



MB15FE600

600W RMS Power
40Hz - 4KHz Frequency Range
3.5 inch Voice Coil
98dB Sensitivity



GENERAL SPECIFICATIONS


Nominal Diameter	15inch
Nominal Impedance	8ohm
Minimum Impedance	5.2ohm
Nominal Power Handling	600Watts
Continuous Power Handling	1200Watts
Sensitivity	98.0dB
Frequency Range	40-4KHz
Voice-coil Diameter	86mm
Voice-coil Material	CCAW
Kind of layer	out 2layers
Magnet Diameter	200*30mm
Magnet Material	Ferrite

THIELE-SMALL PARAMETERS

Resonance Frequency	Fs	42Hz
DC Resistance	Rte	5.2ohm
Mechanical Factor	Qms	6.842
Electrical Factor	Qes	0.381
Total Factor	Qts	0.361
BL Factor	BL	18.057T-m
Effective Moving Mass	Mms	90.7gr
Equivalent Cas Air Load	Vas	204.56liter
Effective Piston Area	Sd	0.09 m
Max. Linear Excursion	Xmax	8mm
Vibration velocity	Cms	0.15

MOUNTING & SHIPPING INFORMATION

Overall Diameter	391mm
Baffle Cut-out Dia.	360mm
Bolt Circle Dia.	373mm
Gasket Thickness	17mm
Overall Depth	181mm
Net Weight	9.6kg

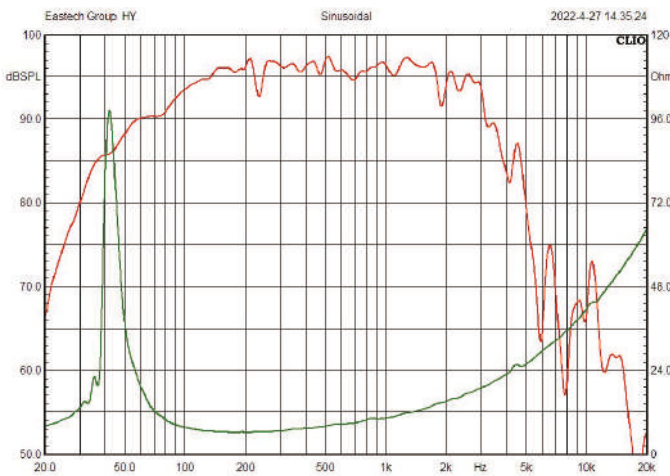

DIMENSIONS (mm)

